



ETA TS 18-0386





Figura A: avellanado interior 2.5 + 4.5







Figura B: avellanado exterior 5.0 + 6.0

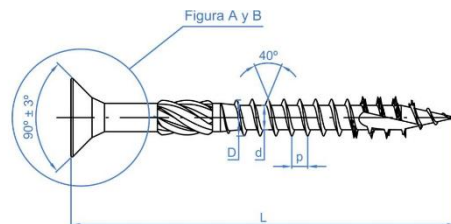

## VIS À BOIS À HAUT RENDEMENT TÊTE FRAISÉE BICHROMATÉE EMPREINTE PZ

### PARAMETRES D'INSTALLATION

DIAMETRE		Ø 2.5	Ø 3.0	Ø 3.5	Ø 4.0	Ø 4.5	Ø 5.0	Ø 6.0
dk: diamètre tête	[mm]	5	6	7	8	8.8	9.8	11.8
L: longueurs	[mm]	10-25	10 – 45	10 – 50	12 – 80	16 – 80	25 – 120	40 – 120
D: diamètre filetage extérieur	[mm]	2.5	3	3.5	4	4.5	5	6
d: diamètre filetage intérieur	[mm]	1.6	2	2.3	2.6	2.9	3.3	3.9
p: pas de vis	[mm]	1.3	1.6	2	2.3	3.6	4	4.6
Empreinte Pz		PZ1	PZ1	PZ2	PZ2	PZ2	PZ2	PZ3
Code embout de vissage		PUPOC01	PUPOC01	PUPOC02	PUPOC02	PUPOC02	PUPOC02	PUPOC03
		PUPOL01	PUPOL01	PUPOL02	PUPOL02	PUPOL02	PUPOL02	PUPOL03

### MATÉRIAUX :



bois noble



bois de pin



bois feuillu



Panneau bois épais

\* AUTRES DIMENSIONS NOUS CONTACTER [contact@visserie-sabf.fr](mailto:contact@visserie-sabf.fr) ou au [02.40.49.94.83](tel:02.40.49.94.83)