




ÉCROU À CRÉNEAU

DIN 935.6

EN ACIER BRUT

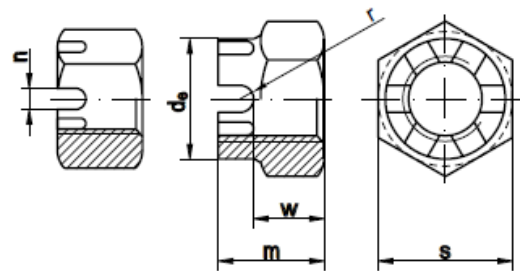

≤ M 10 ≥ M 12

Dimensions	M 4	M 5	M 6	M 8	M 10	M 12	M 14	M 16
d _{e max.}	-	-	-	-	-	16	18	22
m	5	6	7.5	9.5	12	15	16	19
n _{min.}	1.2	1.4	2	2.5	2.8	3.5	3.5	4.5
n _{ISO/DIN}	7	8	10	13	16/17	18/19	21/22	24
w _{max.}	3.2	4	5	6.5	8	10	11	13
split pin	1x10	1.2x12	1.6x14	2x16	2.5x20	3.2x22	3.2x25	4x28
Dimensions	M 18	M 20	M 22	M 24	M 27	M 28*	M 30	M 32*
d _{e max.}	25	28	32	34	38	38	42	46
m	21	22	26	27	30	30	33	35
n _{min.}	4.5	4.5	5.5	5.5	5.5	5.5	7	7
n _{ISO/DIN}	27	30	34/32	36	41	41	46	50
w _{max.}	15	16	18	19	22	22	24	26
split pin	4x32	4x36	5x36	5x40	5x45	5x50	6.3x50	6.3x56
Dimensions	M 33	M 36	M 38*	M 39	M 40*	M 42	M 45	M 48
d _{e max.}	46	50	55	55	55	58	62	65
m	35	38	40	40	48	46	48	50
n _{min.}	7	7	7	7	7	9	9	9
n _{ISO/DIN}	50	55	60	60	60	65	70	75
w _{max.}	26	29	31	31	31	34	36	38
split pin	6.3x56	6.3x63	6.3x70	6.3x71	6.3x70	8x71	8x80	8x80
Dimensions	M 52	M 56	M 60	M 64	M 68	M 72	M 76	M 80
d _{e max.}	70	75	80	85	90	95	100	105
m	54	57	63	66	69	73	76	79
n _{min.}	9	9	11	11	11	11	11	11
n _{ISO/DIN}	80	85	90	95	100	105	110	115
w _{max.}	42	45	48	51	54	58	61	64
split pin	8x90	8x100	10x100	10x100	10x112	10x112	10x125	10x140