



ETA TS 18-0386





Figura A: avellanado interior 4.0 + 4.5






Figura B: avellanado exterior 5.0 + 10.0

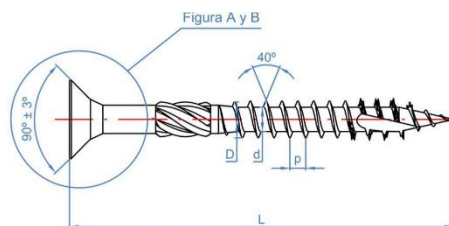

## VIS À BOIS À HAUT RENDEMENT TÊTE FRAISÉE BICHROMATÉE EMPREINTE TX

### PARAMETRES D'INSTALLATION

DIAMETRE		Ø 3.0	Ø 3.5	Ø 4.0	Ø 4.5	Ø 5.0	Ø 6.0	Ø 8.0	Ø 10.0
<b>dk: diamètre tête</b>	[mm]	6	7	8	8.8	9.8	11.8	14.8	18.4
<b>L: longueurs</b>	[mm]	16 – 40	12 – 50	16 – 70	25 – 80	30 – 120	40 – 300	80 – 400	80 – 240
<b>D: diamètre filetage extérieur</b>	[mm]	3	3.5	4	4.5	5	6	8	10
<b>d: diamètre filetage intérieur</b>	[mm]	2	2.3	2.6	2.9	3.3	3.9	5.6	6.5
<b>p: pas de vis</b>	[mm]	1.6	2	2.3	3.6	4	4.6	6.2	6.8
<b>Empreinte Tx</b>		T10	T15	T20	T20	T25	T30	T40	T40
<b>Code embout de vissage</b>		PUTO10	PUTO15	PUTO20	PUTO20	PUTO25	PUTO30	PUTO40	PUTO40

### MATÉRIAUX :



bois noble



bois de pin



bois feuillu



Panneau bois épais

\* AUTRES DIMENSIONS NOUS CONTACTER [contact@visserie-sabf.fr](mailto:contact@visserie-sabf.fr) ou au [02.40.49.94.83](tel:02.40.49.94.83)